


CHRYSLER DOORLOCK INTEGRATION MODULE

Provides Lock, Unlock, Trunk Release, OEM Alarm Arm, OEM Alarm Disarm

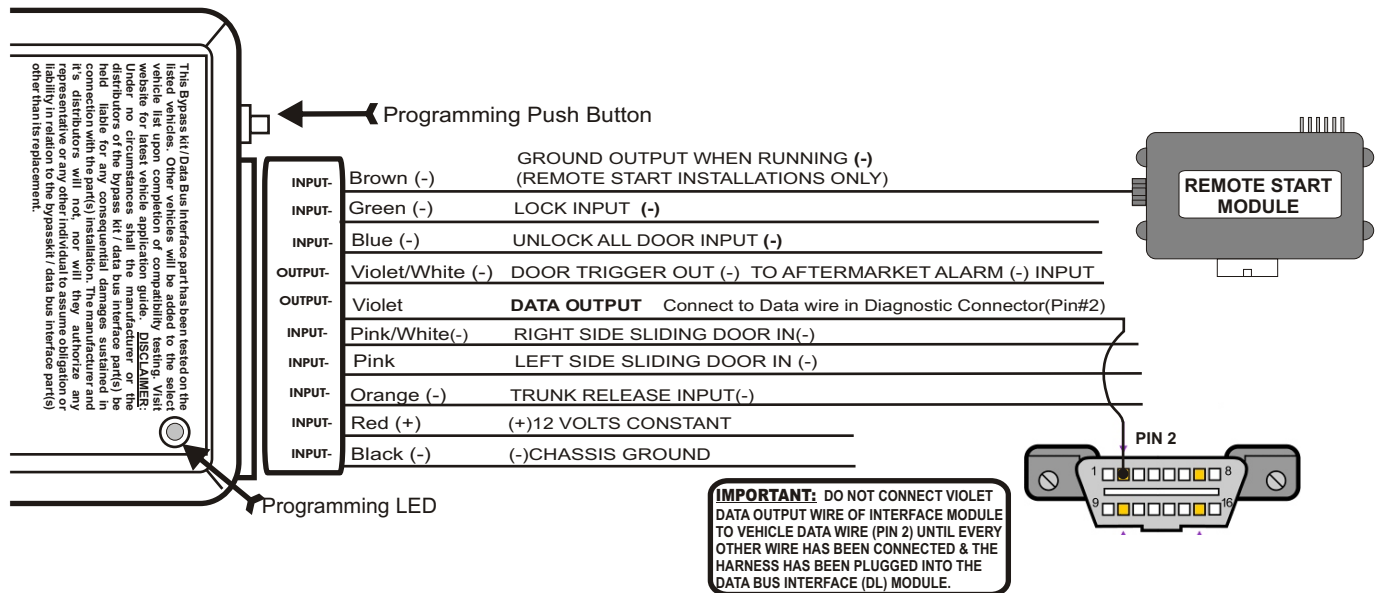

PROGRAMMING:

Once all wire connections have been correctly made:

- 1 - Connect module to the 10-pin harness: the LED will illuminate to confirm correct connection.
- 2 - Insert key into ignition cylinder: LED will go "OFF".
- 3 - THE DATA BUS DOORLOCK INTERFACE MODULE IS NOW PROGRAMMED.

OPTION LIST:

*= DEFAULT VALUE

MODE 1 -UNLOCK :

- * **OPTION 1=** 1st Pulse: unlock driver door
2nd Pulse: unlock all doors

OPTION 2 = 1 pulse: unlock all doors

MODE 8 - RESET

OPTION PROGRAMMING MODE:

- 1-Key "OFF" position, press and hold program button for 2 seconds, LED will flash for 3 seconds then once more to indicate MODE1.
- 2- To change MODE, press button again (1 flash MODE 1, 2 flashes MODE 2)
- 3-To change OPTION, press LOCK or UNLOCK,(After market Remote).
- 4-Horn will chirp once or twice to indicate option level.
- 5-To exit programming OPTION, press and hold button until LED flashes once.
- 6-To return to programming OPTION, go to step 1.

TECH NOTE:

Caravan 2004 and 2005 does not disarm factory alarm by GWR, it disarm with transponder.

Model \ Year	'05	'04	'03
Pacifica	✓	✓	✓
Town & Country	✓	✓	
Caravan	✓	✓	
Grand Caravan	✓	✓	
Liberty	✓		

Keys required to program bypasskit: 1