


1999-03 JEEP GRAND CHEROKEE DOORLOCK & TRANSPONDER BYPASS MODULE

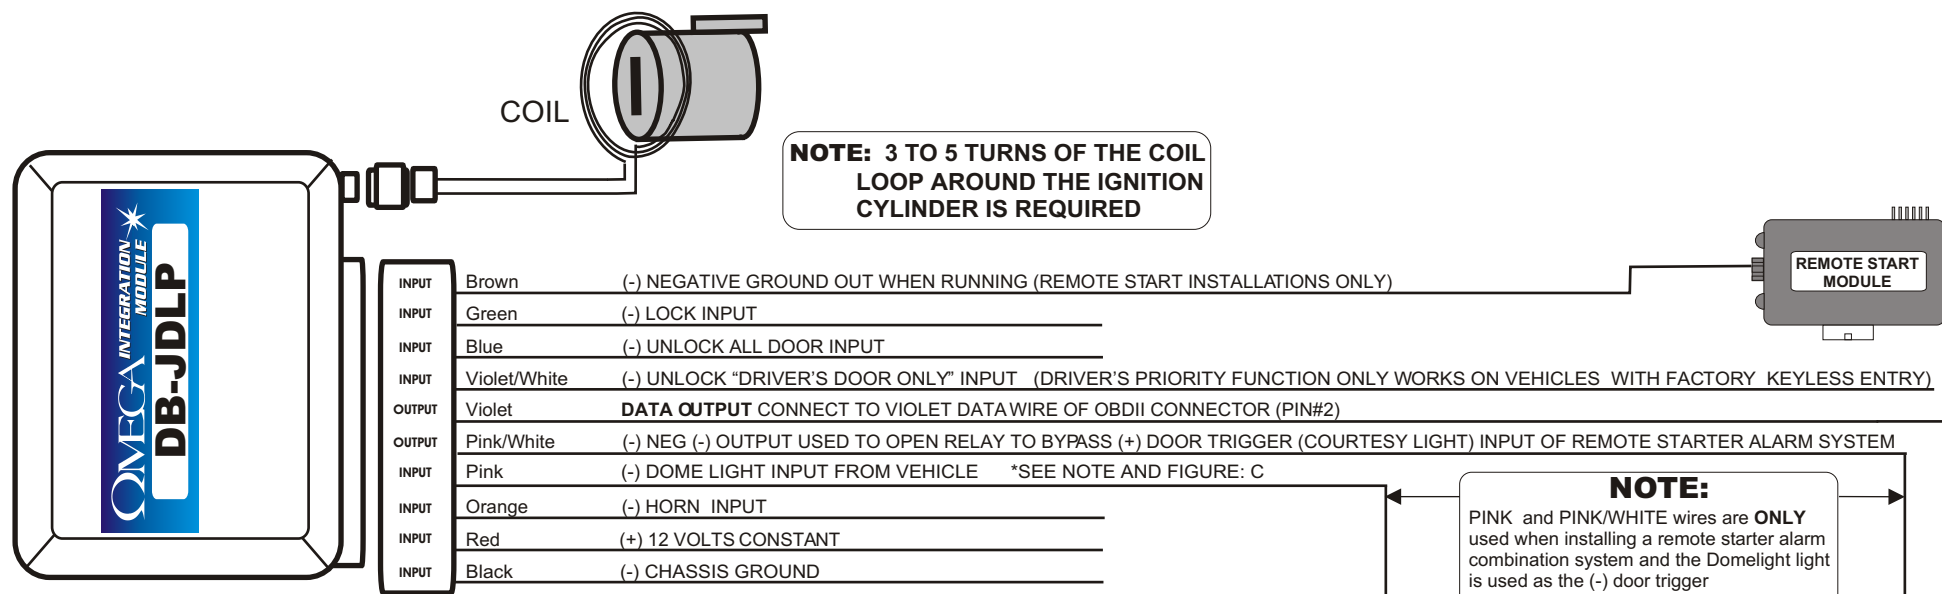

NOTE:
PINK and PINK/WHITE wires are **ONLY** used when installing a remote starter alarm combination system and the Domelight light is used as the (-) door trigger
SEE FIGURE C.

TECH NOTE:
Do not install
bypass module
on a metal surface.

STEP #1 SENTRY KEY PROGRAMMING MODE

You will need 2 valid ignition keys. Proceed as follows:


- 1) Insert the first valid key into the ignition switch and turn the ignition switch "ON" for at least 3 seconds, but no longer than 15 seconds.
- 2) Turn the ignition switch "OFF" and remove the first key.
- 3) Insert the second valid key and turn the ignition switch "ON" within 15 seconds. After 10 secs. a chime will sound and the "SECURITY" light will begin to flash.
Turn the ignition switch "OFF" and remove the second key.

YOU NOW HAVE 60 SECONDS TO PROCEED WITH THE NEXT STEP.


- 4) For the next 2 steps Position & Hold the screw side of the module close and towards the front of the ignition barrel (key cylinder). (Coil Loop is **NOT** used during programming)
- 5) With the help of a jumper wire, power up vehicle ignition.
- 6) After 10 seconds, a chime will sound. The "SECURITY" light will stop flashing, then turn "ON" for 3 seconds, then turn "OFF". The transponder portion of module is now programmed.

IMPORTANT NOTE:

Once the transponder bypass portion has been programmed to a vehicle, it cannot be used on any other Chrysler vehicle. (This a Chrysler Sentry Key feature from factory.)

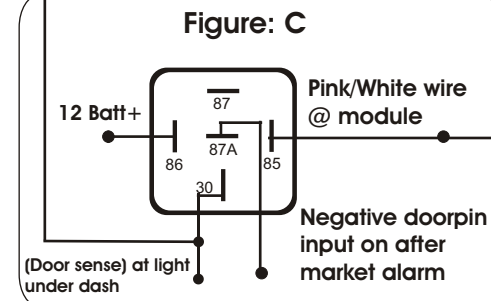

IMPORTANT: DO NOT CONNECT VIOLET DATA OUTPUT WIRE OF INTERFACE MODULE TO VEHICLE DATA WIRE (PIN 2) UNTIL EVERY OTHER WIRE HAS BEEN CONNECTED & THE HARNESS HAS BEEN PLUGGED INTO THE DATA BUS INTERFACE (DL) MODULE.



STEP#2 DOORLOCK PROGRAMMING

Turn key to the ignition ON position. Horn will sound 1 to 5 chirps. The Data Bus Doorlock Interface module is now programmed.